

BUCKNELL UNIVERSITY
Computer Science

CSCI 315 Operating Systems Design

Computer Networks

04/28/2010

CSCI 315 Operating Systems Design

1

The Purpose of Networking

- **Goal:** Allow computers to communicate (exchange data and/or commands).
- **A few desirable properties:**
 - Interoperability,
 - Flexibility,
 - Geographical range,
 - Scalability,
 - Privacy and security.

Matters of *Protocol*

Everything in networking happens through **protocols**:


- ▶ A protocol determines how hosts share and access the medium,
- ▶ A protocol determines how hosts deal with the media bandwidth, errors, flow control, etc,
- ▶ A protocol determines how connections between hosts are established and maintained,
- ▶ A protocol determines how information is routed across short and long distances, etc, etc, etc...

Question: Ok, but what is *protocol*?


The ISO/OSI Reference Model

Source: Computer Networks, Andrew Tanenbaum

ISO: International Standards Organization
OSI: Open Systems Interconnection

 The protocol ***stack***

The idea behind the model: Break up the design to make implementation simpler. Each layer has well-defined functions. Layers pass to one another only the information that is relevant at each level. Communication happens only between **adjacent** layers.

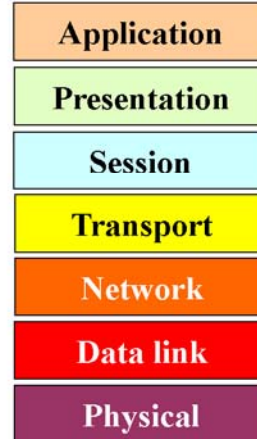

04/28/2010

CSCI 315 Operating Systems Design

4

The Layers in the ISO/OSI RF Model

Physical: Transmit raw bits over *the medium*.

Data Link: Implements the abstraction of an error free medium (handle losses, duplication, errors, flow control).

Network: Routing.

Transport: Break up data into chunks, send them down the protocol stack, receive chunks, put them in the right order, pass them up.

Session: Establish connections between different users and different hosts.


Presentation: Handle syntax and semantics of the info; examples: encoding, encrypting.

Application: Protocols commonly needed by applications (cddb, http, ftp, telnet, etc).


Communication Between Layers within a Host

It's important to specify the services offered to higher layers in the hierarchy. What they are and how to use them: *interface* (or perhaps API).

SAPs (service access points)
Note: This is ISO terminology.

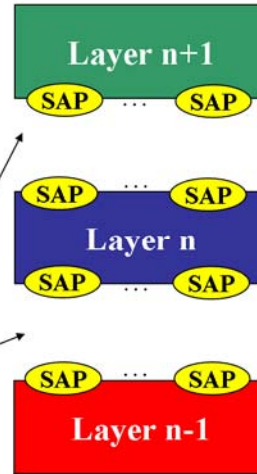

Communication Between Layers in Different Hosts

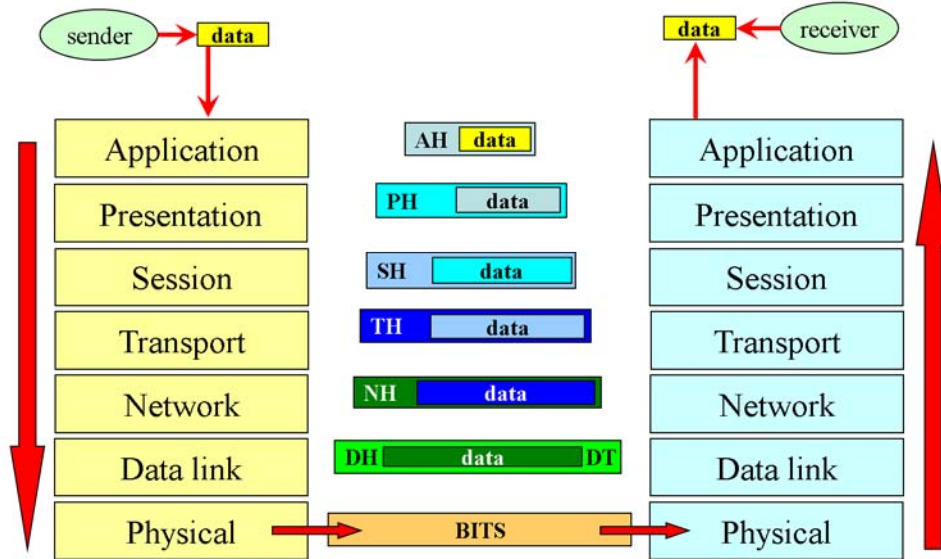


04/28/2010

CSCI 315 Operating Systems Design

7

Communication across Many Hosts

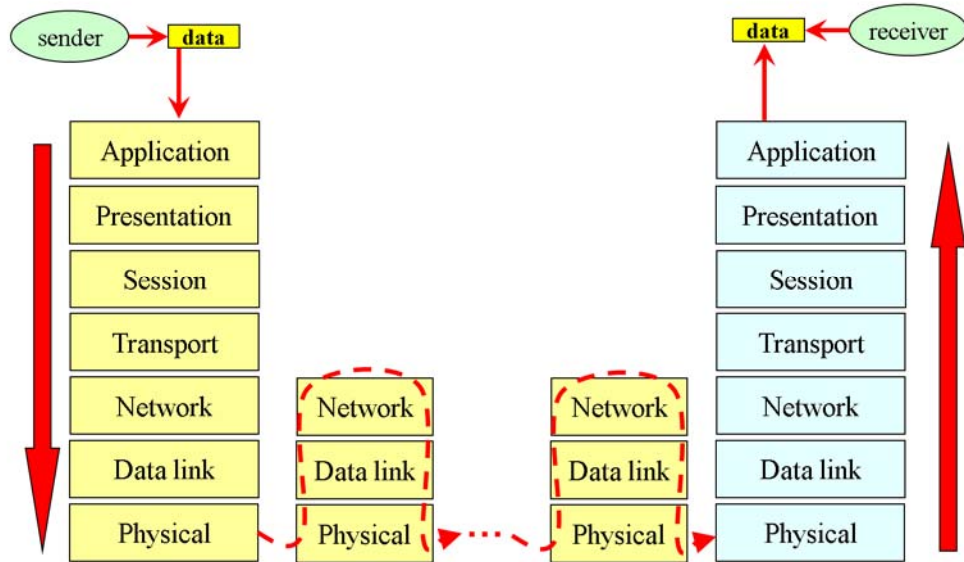


04/28/2010

CSCI 315 Operating Systems Design

8

The Layers in the TCP/IP Protocol Suite

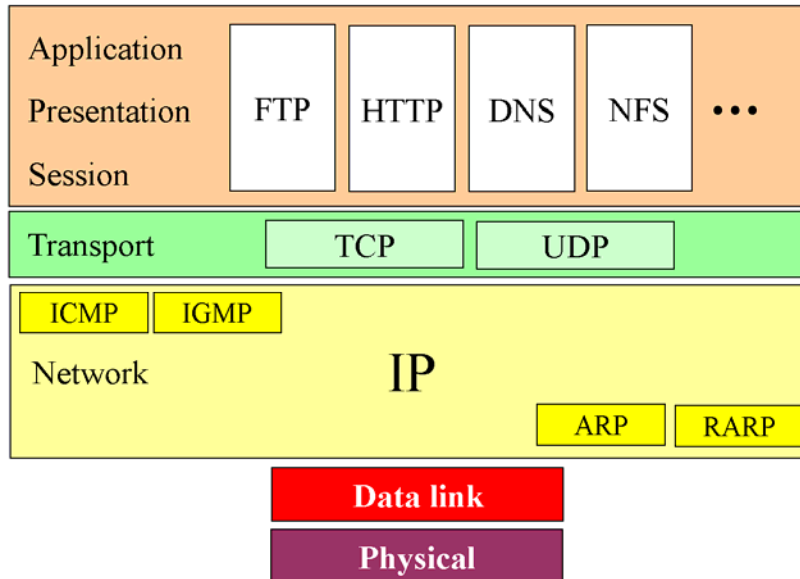

04/28/2010

CSCI 315 Operating Systems Design

9

The TCP/IP Protocol Suite


TCP: connection-oriented; addressing involves host (IP address) and port number; packets are delivered in the order they were sent; no packets are lost.

UDP: best-effort datagrams; addressing involves host (IP address) and port number; packets may not be delivered in the order they were sent; packets may be lost.

Takes data and breaks into packets.




Pushes packets around from source to destination.




IP: defines addressing as in 127.0.0.1 (four bytes); data unit is the packet; packets are sent using the *datagram* paradigm.

Design Alternatives

Point-to-point channels: Physical links (as in wiring) connect every two communicating parties with a “private” channel.

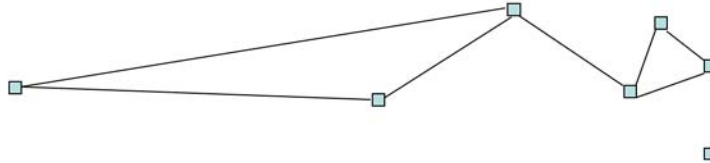


Broadcast channels: Communicating parties are connected by a shared medium; hosts can hear transmissions not necessarily addressed to them.

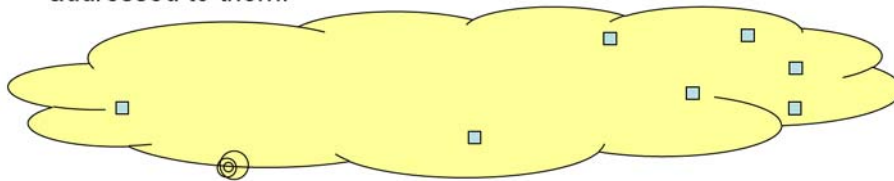


Network Topology


We can classify computer networks according to their topology:




bus




mesh



star



ring



hypercube

Range of Coverage

We can also classify computer networks according to their geographical coverage:

LAN: local area network

WLAN: wireless local area network

MAN: metropolitan area network

WAN: wide area network (long haul network)

Most commonly, we're interested in the seamless integration of all these levels (as in the Internet).

Note: Different levels use very different technologies.

Technology

Network Interface Card (NIC): I/O device in the computer system that allows it to join a network.




The NIC works with a specific medium (twisted-pair, coaxial cable, optic fiber, etc).



As long as its bus allows, a host can have multiple NICs.

To the host, the NIC is just another I/O device, which has its own address (known as MAC address, set by the manufacturer). A *protocol* determines how the NIC accesses the medium.

Ethernet



Ethernet has a bus topology.

Bus Arbitration by Collision Detection:
Carrier Sense Multiple Access with Collision
Detection (CSMA/CD)

Host A listens and finds the bus idle.

Host A starts TX.

Host A detects collision.

Host A backs off.

Host B starts TX.

Host B completes TX.

COLLISION!

Host B backs off.

Host B listens and finds the bus idle.

Host B starts TX.

Host B detects collision.

Host B listens and finds the bus idle.

time

04/28/2010


CSCI 315 Operating Systems Design

15

COTS Ethernet



The medium could be anything that allows for a bus implementation.
(some options are easier to work with than others)

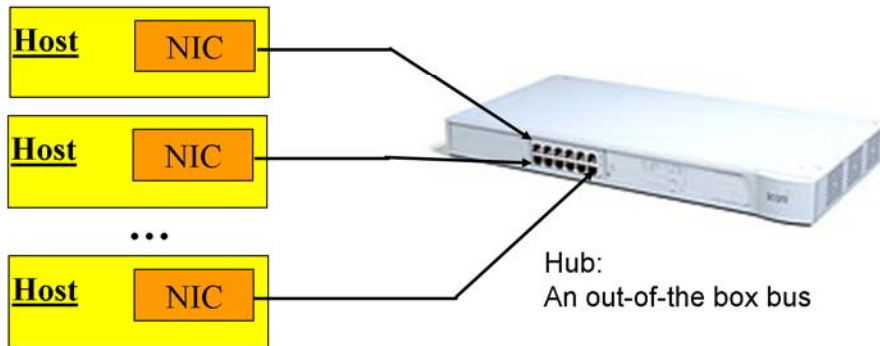


04/28/2010


CSCI 315 Operating Systems Design

16

Switched LANs



The bus bandwidth is limited: switches offer point-to-point connections.

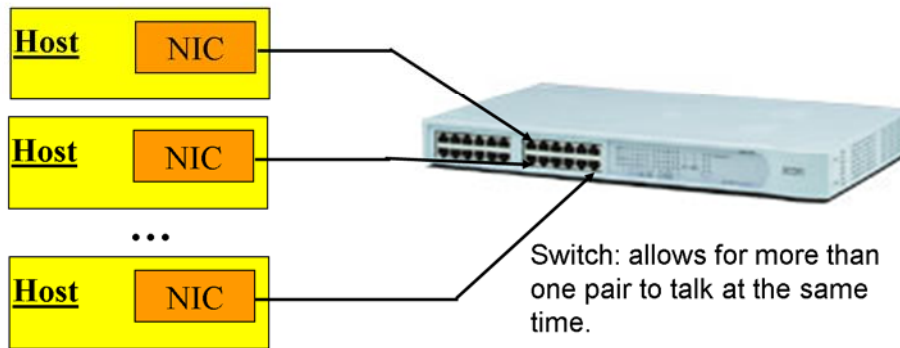


04/28/2010

CSCI 315 Operating Systems Design


17

Network Architecture for Performance

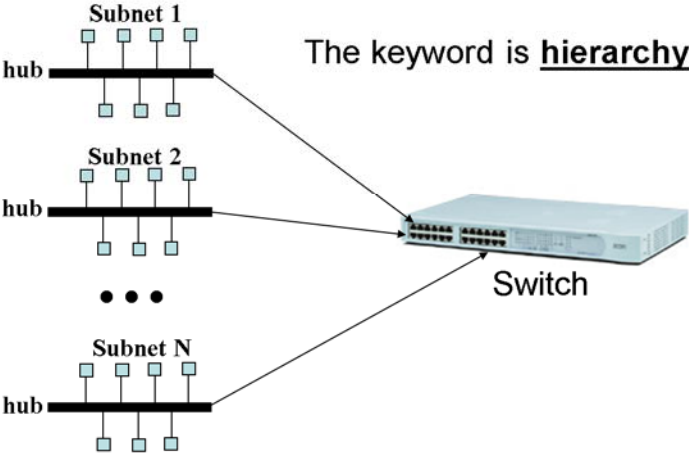

Network Architecture for Performance and Coverage

Again, the keyword is hierarchy:

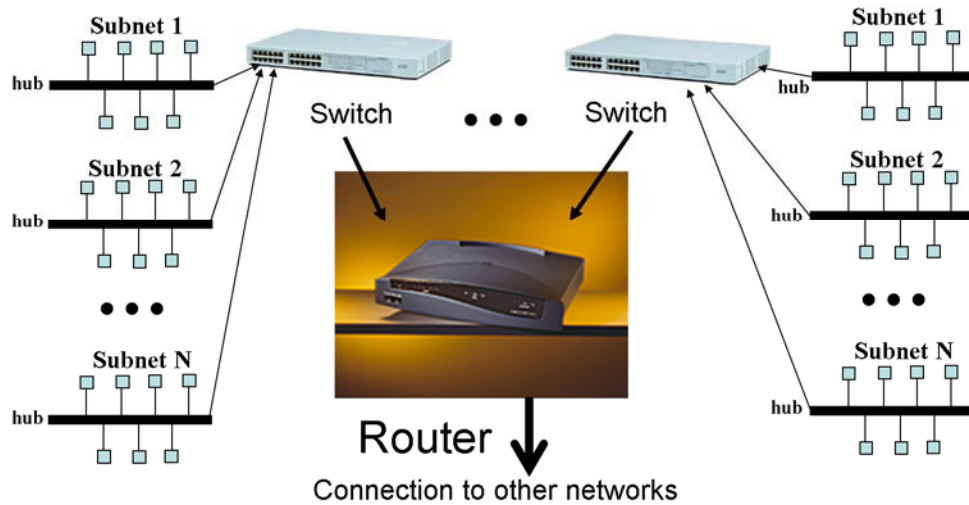

04/28/2010

CSCI 315 Operating Systems Design

19